


NOTE:

- 1) ALL REPRESENTATIONS OF FIXTURES, EQUIPMENT, MATERIALS, ELECTRICAL, PLUMBING, FASTENERS, ETC. ON CLIENTS DESIGN ARE NOT INCLUDED WITH CLIENT'S PACKAGE PURCHASED FROM TENNESSEE LOG HOMES. ONLY ITEMS SPECIFICALLY NOTED IN TENNESSEE LOG HOMES PURCHASE AGREEMENT WILL BE INCLUDED IN THE MATERIALS LIST AND SUPPLIED TO THE CLIENT.
- 2) CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE BEGINNING CONSTRUCTION.
- 3) ALL INTERIOR STUD WALLS ARE NON-LOAD BEARING.
- 4) ALL DOOR AND WINDOW ROUGH OPENINGS TO BE VERIFIED AS LOGS ARE BEING STACKED. OPENINGS MAY NEED TO BE ADJUSTED BY ADDING OR DELETING DOOR AND WINDOW BUCKS OR BY CUTTING LOGS.
- 5) EXTREME CARE IN PRE-CUTTING LOG OPENINGS HAS BEEN TAKEN. THE OWNER/CONTRACTOR IS RESPONSIBLE FOR CHECKING AND ADJUSTING OPENINGS WHEN STACKING LOGS.

RESPONSIBILITY OF THE BUILDER/OWNER

THESE DRAWINGS ARE IN PART DIAGRAMMATIC AND DO NOT SHOW IN DETAIL HOW WORKMANSHIP, MATERIALS AND INSTALLATION OF THE MATERIALS INCLUDING THE FIXTURES AND EQUIPMENT ARE TO BE BROUGHT TOGETHER TO COMPLETE THE "WHOLE" STRUCTURE.

IT IS THE RESPONSIBILITY OF THE BUILDER/OWNER TO BUILD THE STRUCTURE TO COMPLY WITH ALL APPLICABLE NATIONAL, STATE, COUNTY AND CITY CODES AS THEY APPLY TO EACH COMPONENT

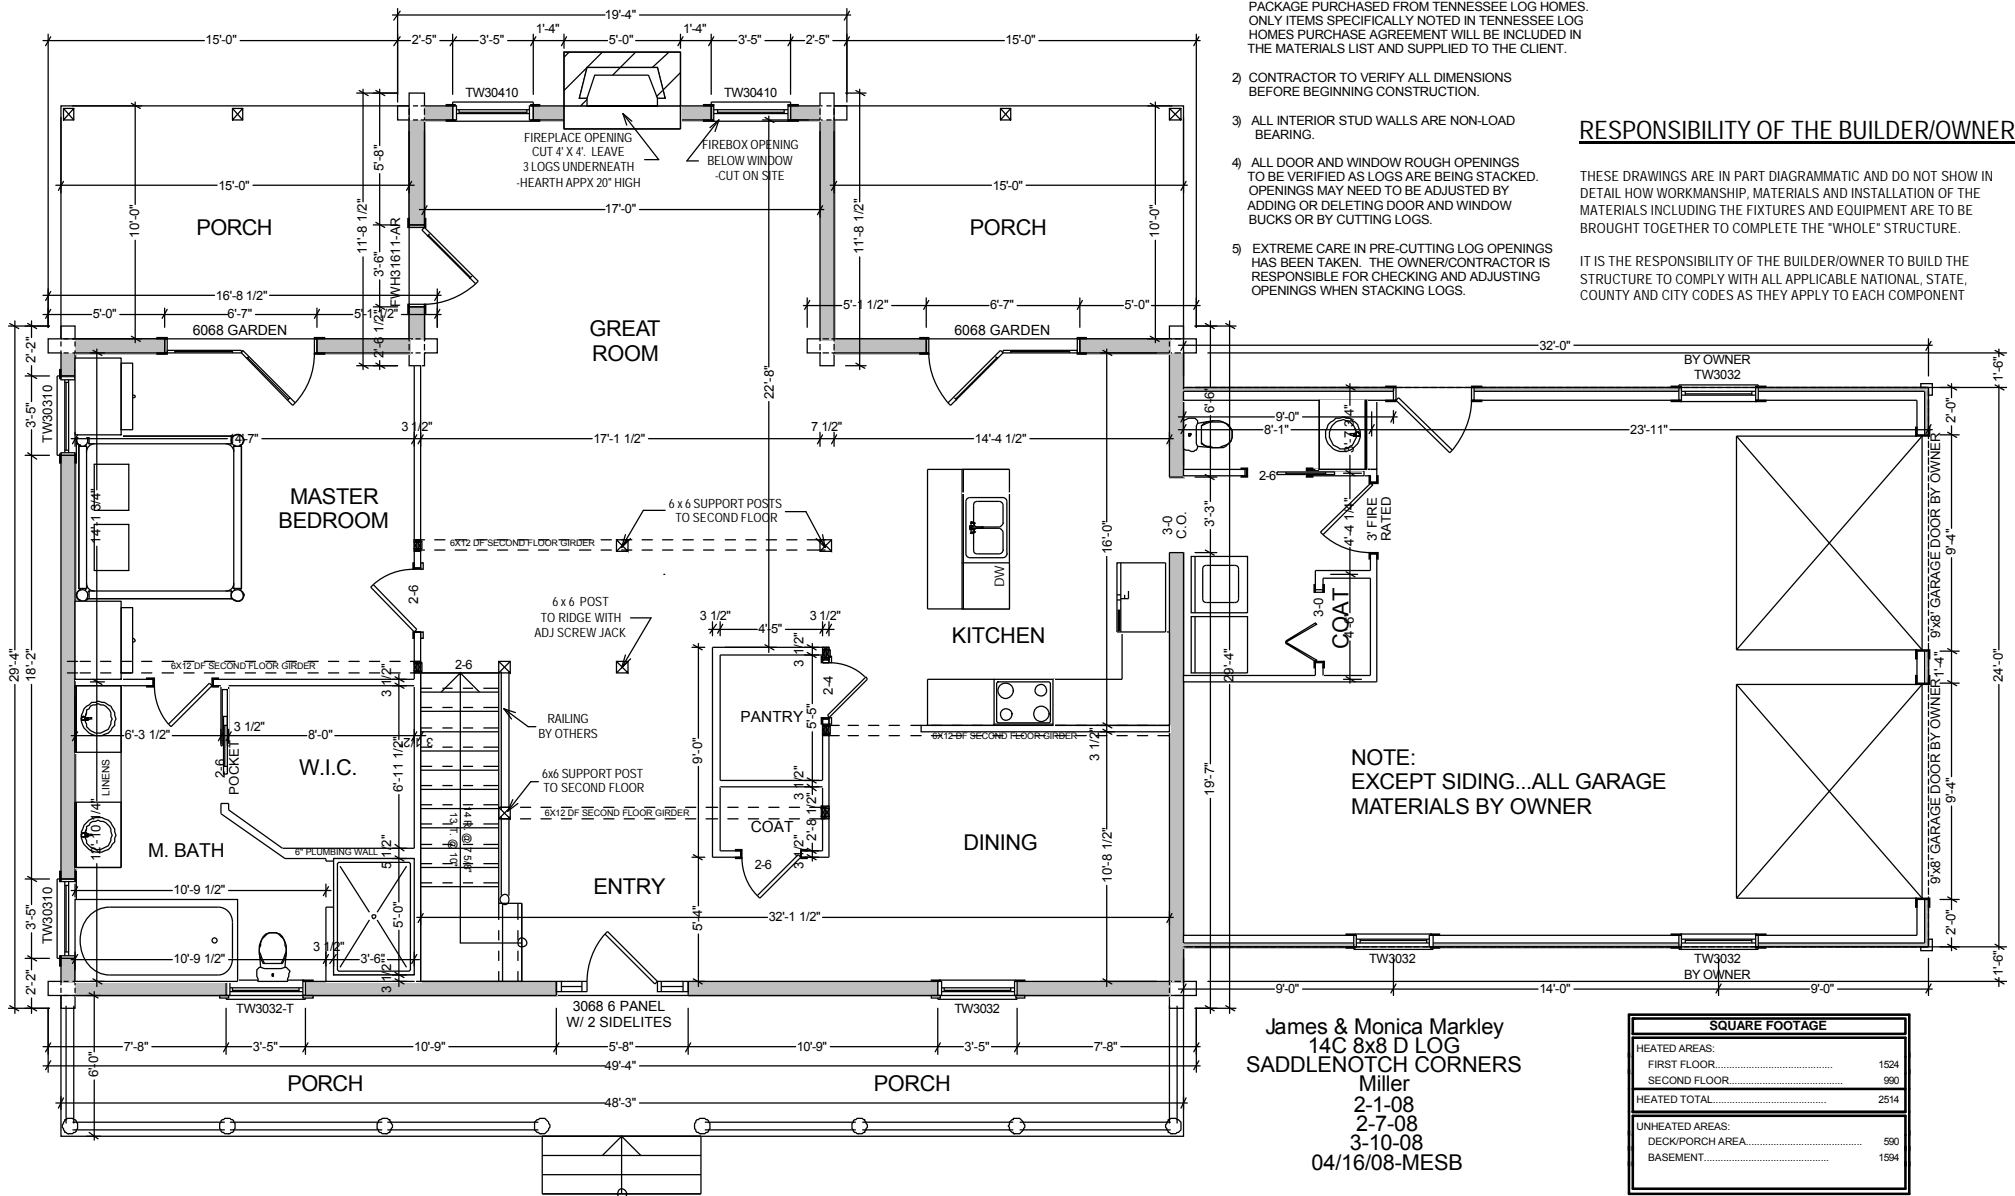


NOTE:
EXCEPT SIDING...ALL GARAGE MATERIALS BY OWNER

James & Monica Markley
14C 8x8 D LOG
SADDLENOTCH CORNERS
Miller
2-1-08
2-7-08
3-10-08
04/16/08-MESB

SQUARE FOOTAGE	
HEATED AREAS:	
FIRST FLOOR.....	1524
SECOND FLOOR.....	990
HEATED TOTAL.....	2514
UNHEATED AREAS:	
DECK/PORCH AREA.....	590
BASEMENT.....	1594

MAIN FLOOR PLAN

4X8 DF PREMIER SECOND FLOOR JOISTS
NOTCH INTO TOP COURSE OF LOGS

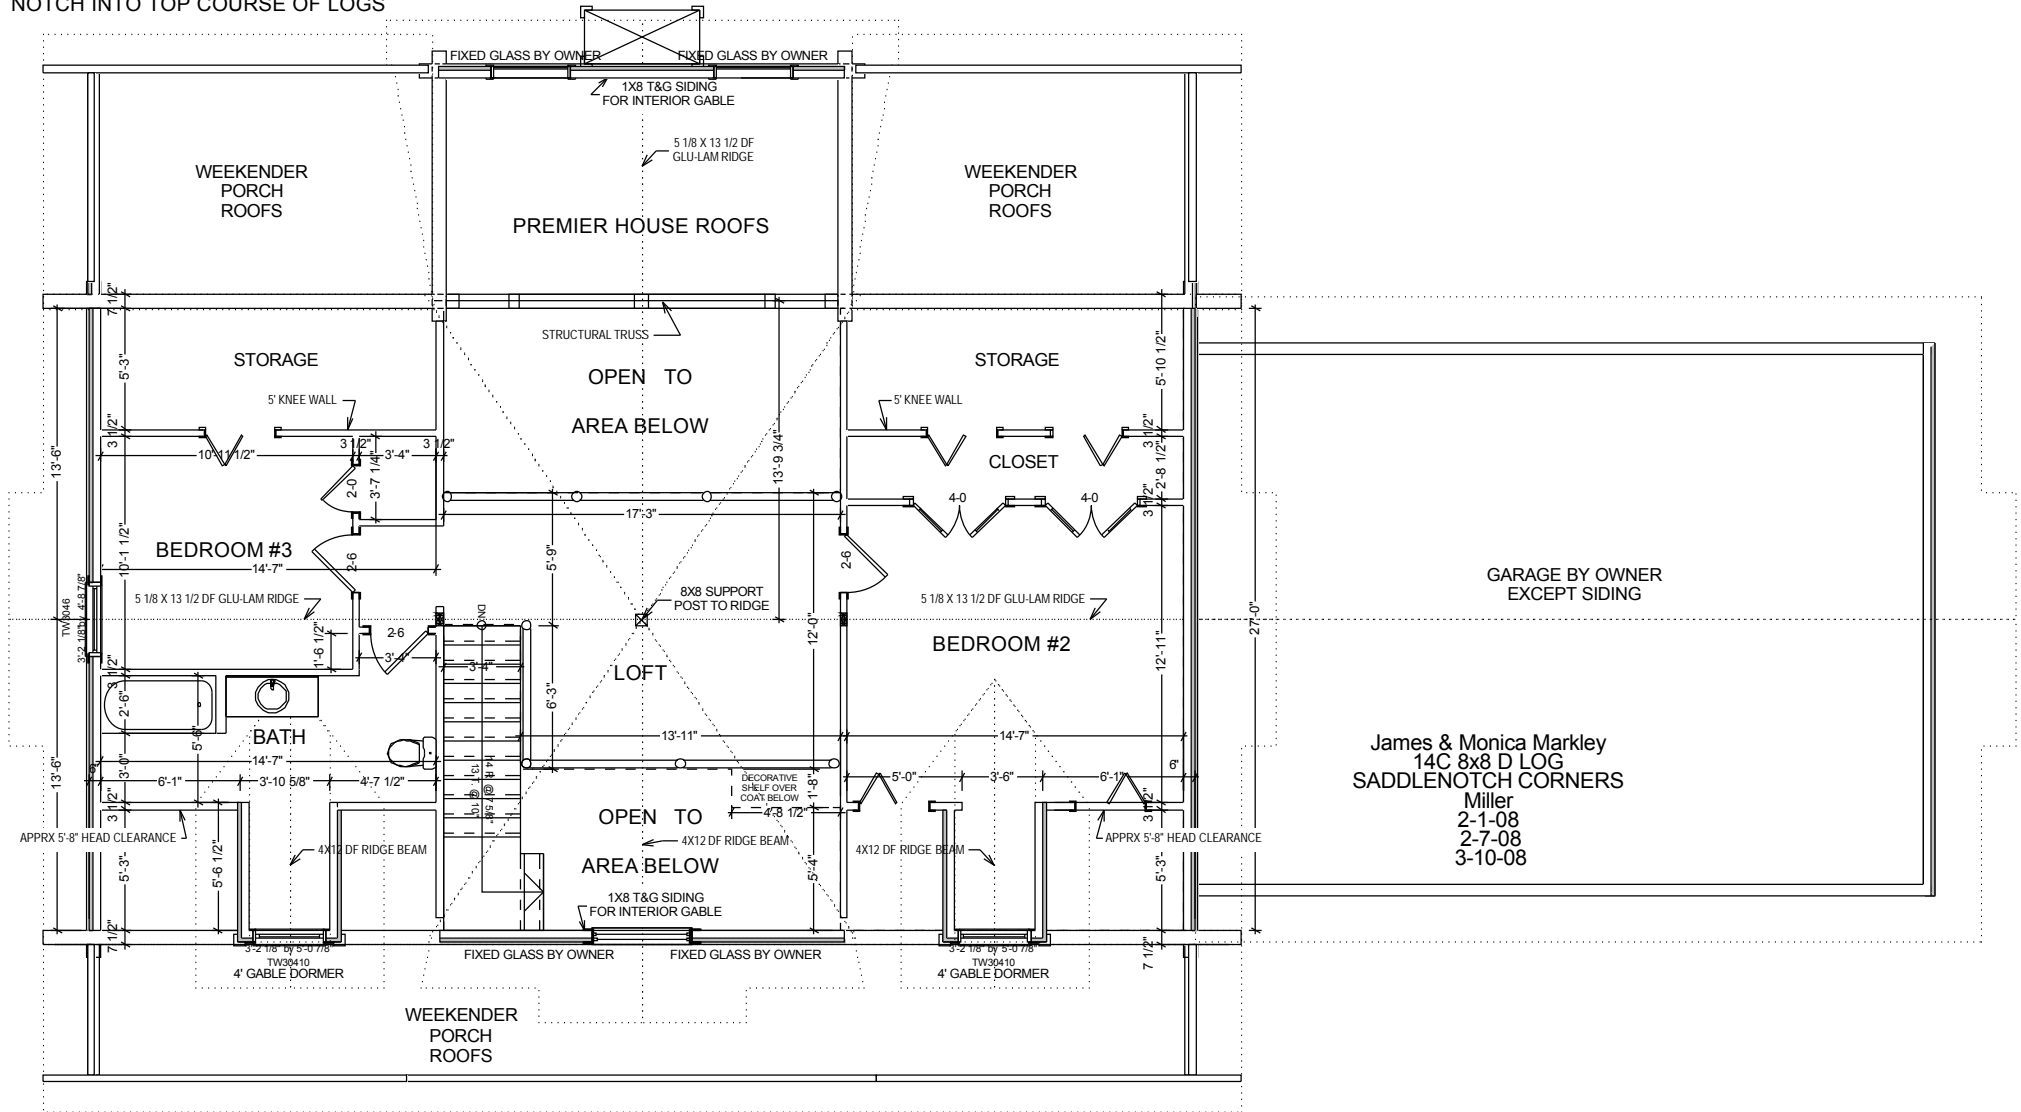


James & Monica Markley
 14C 8x8 D LOG
 SADDLENOTCH CORNERS
 Miller
 2-1-08
 2-7-08
 3-10-08

SECOND FLOOR PLAN

IMPORTANT FOR LOG HOMES:

YOUR FOUNDATION/SUBFLOOR MUST BE THE SIZE SHOWN ON THIS PLAN IN ORDER FOR YOUR PRE-CUT LOG WALL SYSTEM TO FIT PROPERLY. IF YOUR FOUNDATION IS NOT LEVEL, SQUARE OR THE SIZE SHOWN; ANY OF THESE VARIANCES WILL CAUSE YOUR LOG WALLS TO NOT FIT PROPERLY. THIS IN TURN WILL LEAD TO MAJOR JOB SITE CHANGES THAT WILL HAVE TO BE MADE BY YOUR BUILDER. YOU MUST VERIFY WITH YOUR FOUNDATION CONTRACTOR AND BUILDER PRIOR TO RECEIVING YOUR HOME THAT THE FOUNDATION IS CORRECT.

- 1) ALL REPRESENTATIONS OF FIXTURES, EQUIPMENT, MATERIALS, ELECTRICAL, PLUMBING, FASTENERS, ETC. ON CLIENT'S DESIGN ARE NOT INCLUDED WITH CLIENT'S PACKAGE PURCHASED FROM TENNESSEE LOG HOMES. ONLY ITEMS SPECIFICALLY NOTED IN TENNESSEE LOG HOMES PURCHASE AGREEMENT WILL BE INCLUDED IN THE MATERIALS LIST AND SUPPLIED TO THE CLIENT.
- 2) FOUNDATION MATERIALS SUPPLIED BY OWNER UNLESS SPECIFIED BY CONTRACT.
- 3) BUILDER TO VERIFY ALL DIMENSIONS ON JOB SITE.
- 4) IF FOUNDATION WALLS ARE NOT SQUARE OR LEVEL, CORRECT DURING SUBFLOOR CONSTRUCTION.
- 5) SOLID BLOCKING TO BE USED UNDER ALL POSTS.
- 6) FIREPLACE DIMENSIONS TO BE VERIFIED BY OWNER BEFORE CONSTRUCTION.
- 7) BLOCKING TO BE USED UNDER STUD WALLS RUNNING PARALLEL TO FLOOR JOISTS.
- 8) BASEMENT WALLS CONSTRUCTED AS PER SITE CONDITIONS AND LOCAL CODES.
- 9) POSTS DIMENSIONED UNDER GIRDER ARE LOCATED FOR UPPER LEVEL SUPPORTS. ALL OTHER GIRDER SUPPORT POSTS ARE LOCATED PER LOCAL CODE ON JOB SITE.

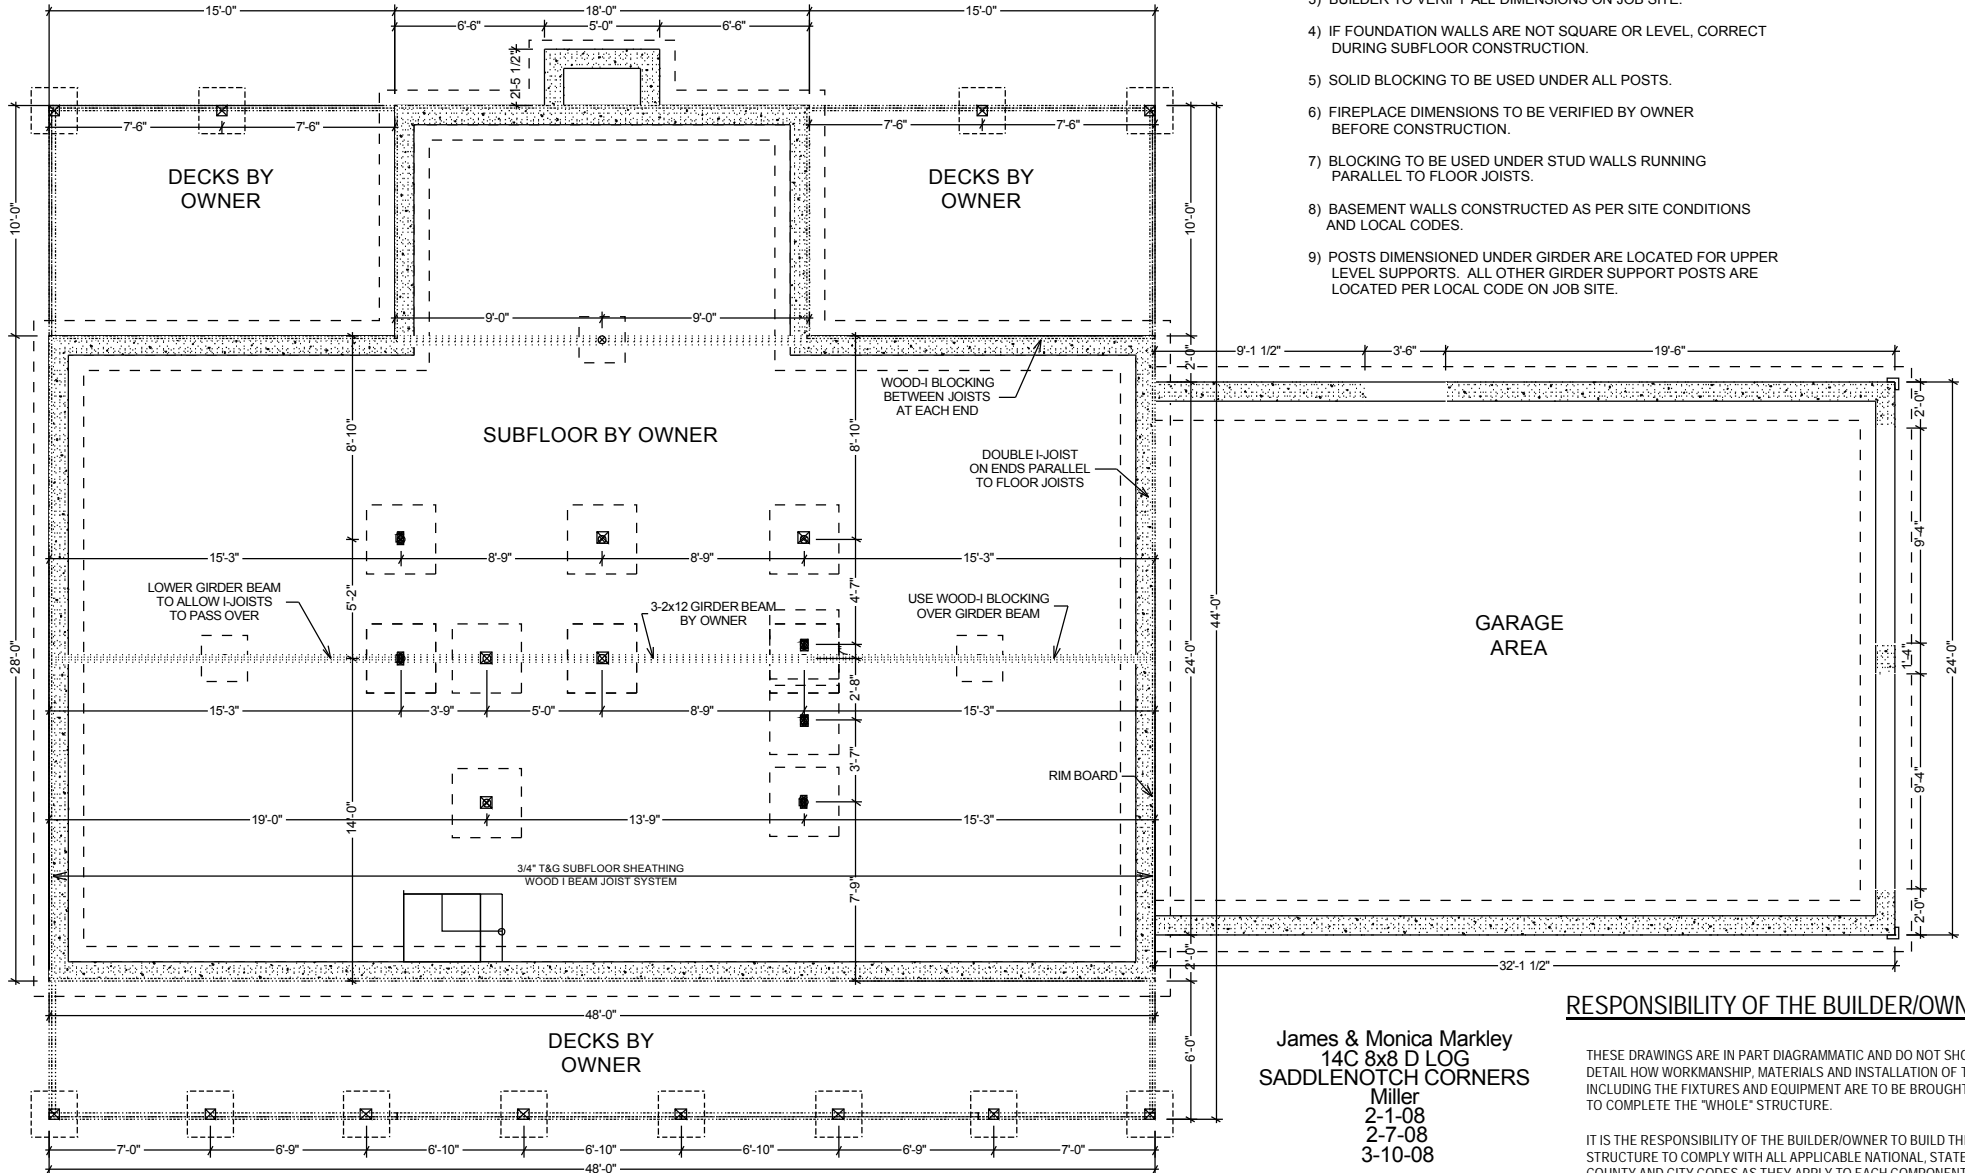

FOUNDATION PLAN

IMPORTANT:


SUBFLOOR MUST BE SIZE GIVEN IN ORDER FOR LOGS TO FIT. THESE DIMENSIONS DO NOT INCLUDE ANY ALLOWANCES FOR FACING MATERIAL. CONCRETE BLOCK SHOULD BE LAID TO SUBFLOOR SIZE DIMENSIONS.


RESPONSIBILITY OF THE BUILDER/OWNER

THESE DRAWINGS ARE IN PART DIAGRAMMATIC AND DO NOT SHOW IN DETAIL HOW WORKMANSHIP, MATERIALS AND INSTALLATION OF THE MATI INCLUDING THE FIXTURES AND EQUIPMENT ARE TO BE BROUGHT TOGETHER TO COMPLETE THE "WHOLE" STRUCTURE.

IT IS THE RESPONSIBILITY OF THE BUILDER/OWNER TO BUILD THE STRUCTURE TO COMPLY WITH ALL APPLICABLE NATIONAL, STATE, COUNTY AND CITY CODES AS THEY APPLY TO EACH COMPONENT

James & Monica Markley
 14C 8x8 D LOG
 SADDLENOTCH CORNERS
 Miller
 2-1-08
 2-7-08
 3-10-08

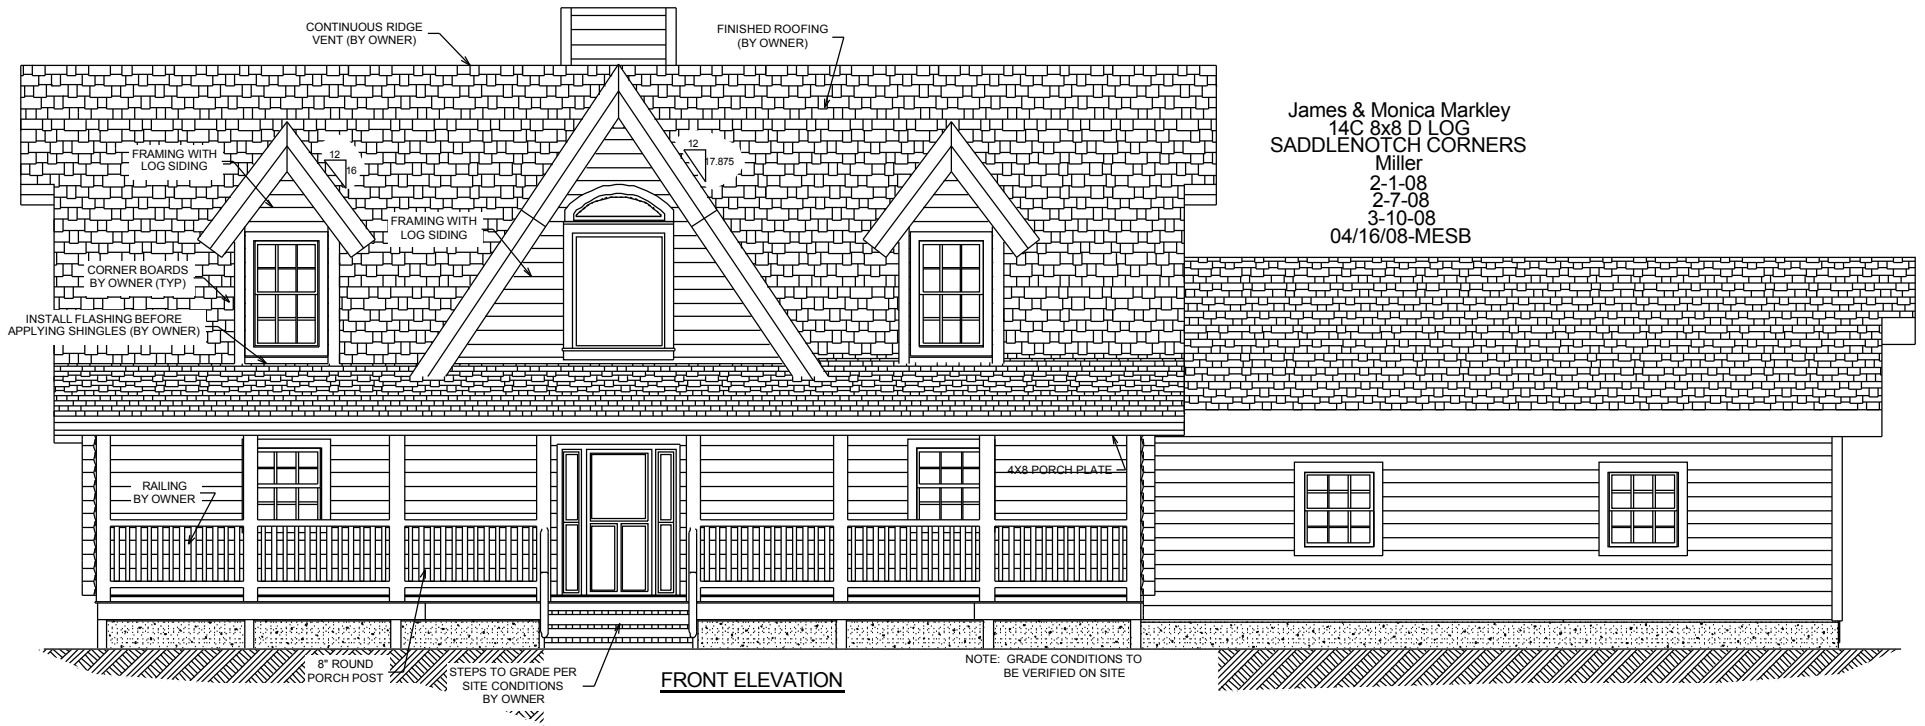

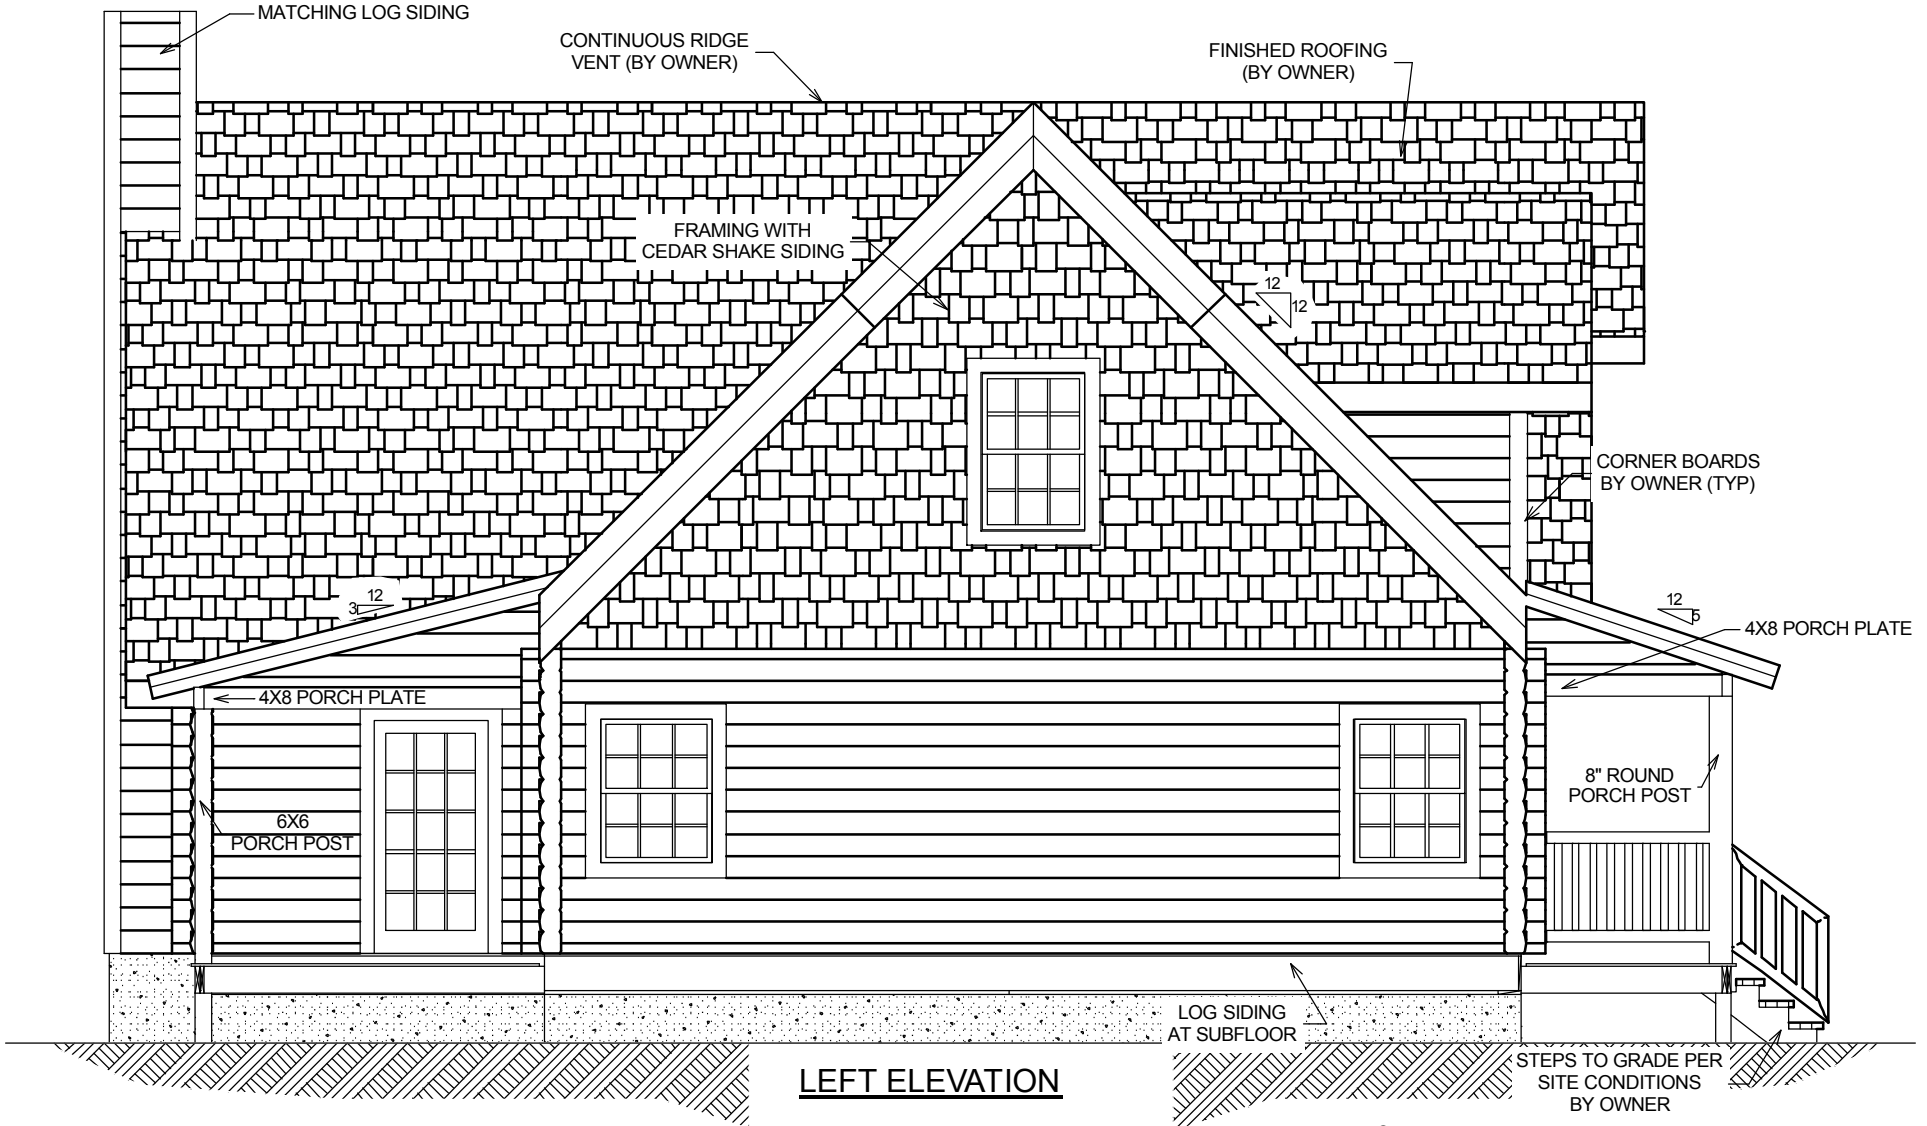

NOTE: GRADE CONDITIONS TO BE VERIFIED ON SITE

James & Monica Markley
 14C 8x8 D LOG
 SADDLENOTCH CORNERS
 Miller
 2-1-08
 2-7-08
 3-10-08
 04/16/08-MESB



James & Monica Markley
14C 8x8 D LOG
SADDLENOTCH CORNERS
Miller
2-1-08
2-7-08
3-10-08
04/16/08-MESB

